
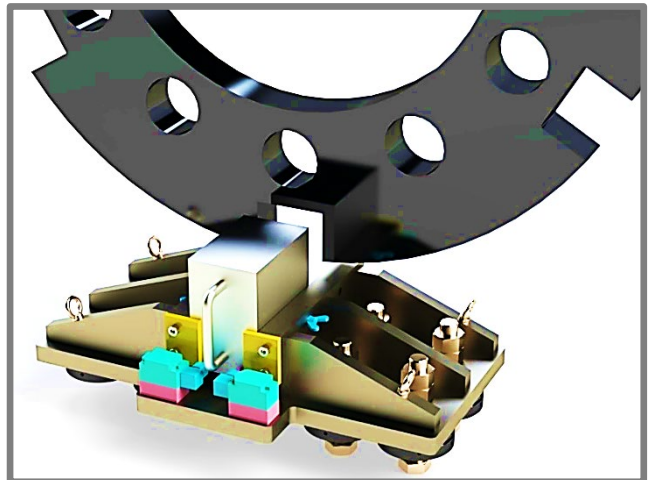


Hi-LOCK<sup>®</sup> Shaft Locking Device

State-of-the-Art  
Shaft Locking Device

Hi-LOCK<sup>®</sup>

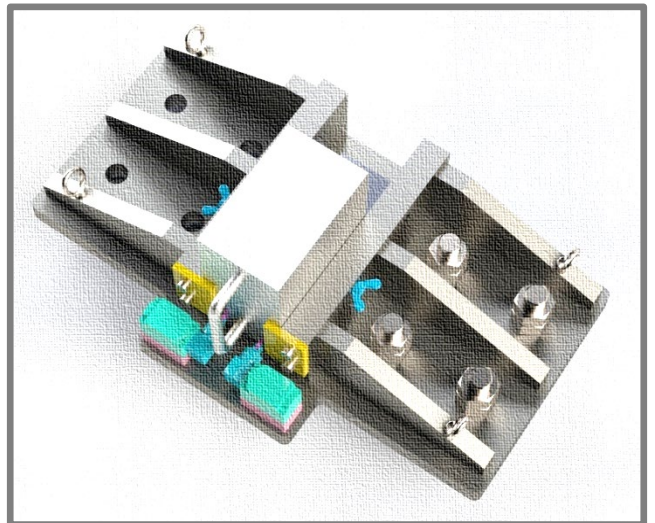

## High Reliability

It offers a significantly better solution to stop a shaft rotation using the key for the ships with Twin Propulsion system.

## High Safety & High Intuition

It is easier to check a condition of shaft locking by limits switch.


## Easy Installation

It can be installed with **Hi-MAC**® not to be needed to be machined additionally to adjust an accurate height of stopper.


The locking capacity of Hi-LOCK for break force is up to **1500kNm**.

The Hi-LOCK is tailor-made to suit each specific project

The Hi-LOCK for above 1500kNm break force is possible on customer's request.

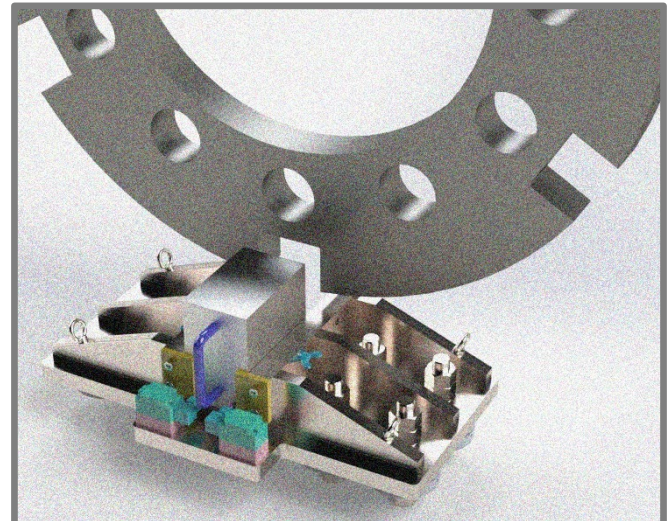

UN-LOCKING CONDITION

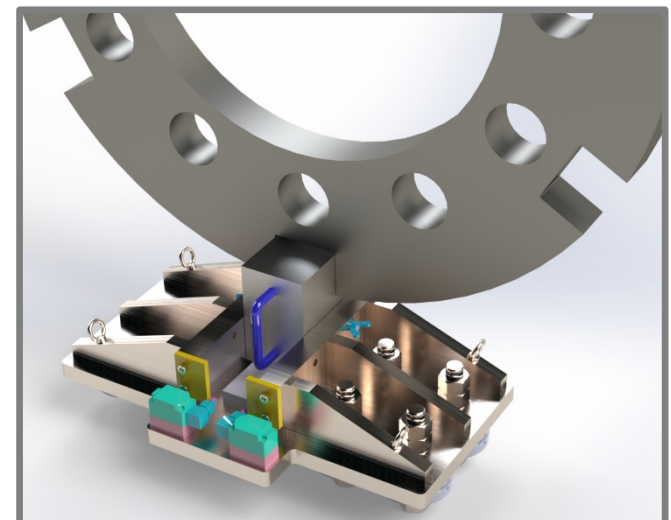

LOCKING CONDITION

Movena Korea Co., Ltd.

1902, Centum IS Tower, Centum buk-daero 60, Haeundae-gu, Busan, Rep. of Korea  
Tel. +82 51 782 0969 / Fax. +82 51 980 2881 / E-mail. korea@movena-group.com